

Standard Oil Drain

Model 613

Used with 16-gallon (120 lb.) open-top drum (drum not included).

26-Gallon Pressurized Used Oil Receiver

Model 3624

Pressurized waste oil tank and bowl made from high-strength polyethylene—no dents or corrosion. Built-in oil filter drain, tool tray and sight gauge. Includes pop-off valve and fixed air regulator for safety.

20-Gallon Pressurized Used Oil Receiver

Model 3614

Features an extra large 18-inch offset telescopic (44 to 72 inch range) bowl and averages 15-20 vehicles before tank evacuation!

18-Gallon Pressurized Used Oil Receiver

Model 3601

Features a 14" / 2.5 gallon bowl, adjustable from 45" to 72" in height.



613



3601

3614



3624



8586



8586-A

Portable Drain

Model 8586

Mounts directly to a 16-gallon drum (drum not included). Screen included.

Portable Drain with Drum

Model 8586-A

Mounts directly to a 16-gallon drum. Drain consists of cover-mounted drain with telescoping tube and sturdy steel dolly. Screen included.

Portable Pressurized Oil Extractor

Model 8588

24-gallon tank to reduce trips to waste container. Extractor includes six suction wands.

Pressurized Oil Dispenser (with meter)

Model 8589-A

17-gallon tank. Dispenser is equipped with a 79" clear dispensing hose with valve, air pressure gauge, pressure-relief valve and fluid level gauge.

Portable Pressurized Waste Oil Drain

Model 961003

Includes a 24-gallon wheel-mounted tank.



8588



8589-A



961003

30-Litre Plastic Waste Oil Drain**Model 50330**

- With telescopic bowl.

68-Litre Plastic Waste Oil Drain**Model 50368**

- With telescopic bowl.

50330



50368

**13-16 Litre Vacuum Waste Oil Extractor****Model 50220**

- Suction time of 1-1/2 to 2 times/minute with hot oil.

90-Litre Air Operated Waste Oil Drain**Model 50390**

- 18 liters, 16" diameter collection bowl
- Includes extension funnel for bowl - 23" Diameter
- Adjustable bowl height (39.8" to 49.4").

115-Litre Truck Cantilever Waste Oil Drain**Model 50800**

- Cantilever basin fits under vehicle for oil draining without hoist
- Includes vacuum extraction with dipstick wands
- Tank is evacuated with shop air
- 50 litre basin.

50220



50800



50390



WASTE OIL DRAIN ACCESSORIES



CODE 331



Truck Oil Drain Cart Model 84714

Large 20-gallon capacity cart. Used-oil transfer by gravity or suction. Order drain valve or suction evacuation pump and fluid couplings separately. Height is 8.65”.

WASTE OIL DRAIN ACCESSORIES



CODE 001



5077

Low Profile Transfer Tanker Models 5077 / 5097

Pump moves five gallons a minute through the 8-foot transfer hose
Only 7-1/2” from floor to top of reservoir
15-gallon reservoir.

5077, Electric Pump
5097, Pneumatic Pump



5097

Pneumativac

Model 07300

Holds up to 2.3 gallons (8.8 litres) of fluid. It uses standard compressed shop-air and a powerful venturi vacuum to quickly and conveniently evacuate reservoirs with no manual effort.
Capacity: 2.3 gallons (8.8 litres)

Fluid Evacuator

Model 07400

Manually operated unit that requires no electricity or compressed air. Chemical resistant construction. Three evacuation tubes with adapters.
Capacity: 1.9 gallons (7.3 litres)

Fluid Evacuator Plus

Model 07201

A reversing valve allows the unit to be used for evacuating or dispensing fluids. 2.3-gallon (8.8) litre reservoir, and operates without electricity or compressed air. Chemical resistant construction, a large stable base, and three evacuation tubes with adapters.
Capacity: 2.3 gallons (8.8 litres)



07201



07300



07400



Manual Grease Pump Model 1292

Dispense high-pressure lubrication in any weather—even at 0°F. Unit clamps on any 25-50 lb. refinery container in 60 seconds. Includes flexible follower. 2500 PSI pressure. 5' hose included.

Portable / Stationary Filler Pump Model 1296

Clamps to any original 25-50 lb. refinery container. Handles medium and light lubricants in any weather. Includes pump, filler socket, flexible follower plate and ribbed steel drum cover. Rust resistant. Tube size 1-1/2".

- Fast (less than a minute), positive gun refilling with simple pumping action
- Filler socket assembly eliminates mess, waste and air pockets.

1296

Manual Gear Lube Dispensers Models 535LN / 549 / 549-58 / 1293

Manually operated pumps provide fast, clean refilling of differentials, gear cases and final drives.

- Metered models have air expeller built into pump tube (prevents air from registering on meter).

Specifications					
Model	535LN	549	549-58	1254	1293
Capacity (lbs)	120	120	120	30	30
Base	Roll-a-round	Roll-a-round	None	9" dia. 13-3/4" W	None
Hose Length	5'	5'	5'	5'	5'



1292



535



1254

Dispensing Pumps

Models 7533-4 / 7534-4 / 7535-4 / 8570-5 / 8571-5 / 7117-1

- Compatible with oils and gear lubes
- Units attach directly to original container.

Specifications

Product #	7533-4	7534-4	7535-4	8570-5	8571-5*	7117-1**
Description	Dual-Leverage	Dual-Leverage	Dual-Leverage	Dual-Leverage	Dual-Leverage	Standard Duty
Drum Size	5 gal.	16 gal.	55 gal.	16 gal.	16 gal.	25 lb. - 35 lb. pails
Delivery Per Stroke	2.6 oz. per stroke	2.6 oz. per stroke	2.6 oz. per stroke	2.6 oz. per stroke	2.6 oz. per stroke	2.6 oz. per stroke
Outlet	1/2" NPTF(f)	1/2" NPTF(f)	1/2" NPTF(f)	1/2" NPTF(f)	1/2" NPTF(f)	N/A
Included Items	5-1/2' Hose Curved Nozzle Pail Cover	5-1/2' Hose Curved Nozzle Pail Cover	5-1/2' Hose Curved Nozzle 2" NPTF(m) Bung Adapter	5-1/2' Hose Curved Nozzle Drum Cover In-Line Electronic Meter Dolly	1' Hose Curved Nozzle Drum Cover In-Line Electronic Meter Filter Dolly	5" Hose Curved Nozzle Pail Cover Assembly

* Designed for automatic transmission fluid

** Designed for fluids and non-aggressive lubricants



7535-4

8571-5



8570-5

7117-1

High-Pressure Bucket Pump


Model 6713-4

Can be used to pump oils and greases up to NLGI #3-type grease. Ideal for extreme pressure applications, such as gas valve lubrication, mounting and dismounting of bearings and hydraulic movement.

- Capacity: 30 lb. (container included)
- Delivery: .0625 oz. per stroke
- Develops up to 15,000 psi
- Pump outlet: 1/4" NPTF(f).



6713-4

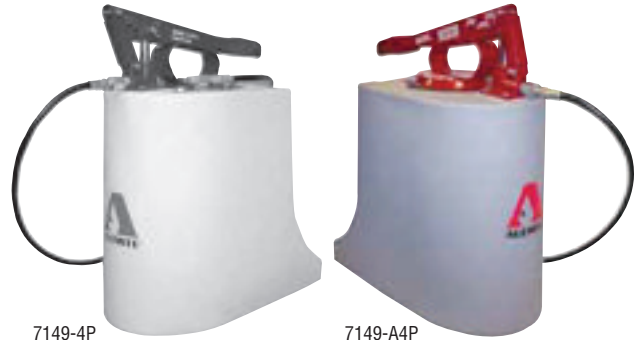

7149-4P

7149-A4P

7149 Series Multi-Pressure Bucket Pumps

These manual pumps offer variable pressure between 2,500 and 5,000 psi. Adjustable lever has three positions to adapt pump to lubricant type and operating conditions.

- Capacity of 35 lb. or 5 gallons
- Delivery - 1 oz. per stroke
- Develops 2,500 - 5,000 psi.

Specifications

Product #	7149-4	7149-A4	7149-E4 7149-F4	7149-T	7149-V	7149-A4P	7149-4P
Description	Multi-Pressure Bucket Pump	Multi-Pressure Bucket Pump	Multi-Pressure Bucket Pump	Multi-Pressure Bucket Pump	Multi-Pressure Bucket Pump	High Impact Plastic Bucket Pump Assembly	High Impact Plastic Bucket Pump Assembly
Included Items	N/A	Hose Assembly	Hose & coupler assembly, Button head fitting, Plug Button	Porta-Cart	Hose & coupler assembly, Porta-Cart	Hose Assembly	N/A



7149-4

7149-T



Lever-Action Bucket Pump Model G400

Fits 25-50 lb. buckets. Includes pump, 18" drum cover and 4' delivery hose. Perfect for transferring transmission fluid or heavier fluids.

Grease Gun Filler Pump Model G404

For bulk filling grease gun G102 or any gun using filler nipple G907. Fits 25-50 lb. buckets. Comes with follower plate, drum cover and filler adapter.

LUBE METERING



954

Electronic Lube Meters Models 905 / 954 / 953 / 967

- Dispense motor oil, ATF and gear lube
- One model can dispense pints, quarts, litres or gallons
- Automatic non-drip nozzle
- .01 increment readout for precise measurement.



953

Specifications

Model	905	954	953	967
Lock-On / Lock-Open	Rigid/ 70°/ Auto nozzle	Flexible with auto nozzle	Rigid/30°/ Auto tip	Flexible w/ 84799 nozzle
Extension	Yes	Yes	Yes	Yes
PSI	1000	1500	1500	1500
GPM	5	6	6	4

* 8.0 gpm without no-drip nozzle. ** Models 905 offers preset mode
Model 905 – ATF, hydraulic fluid, motor oils, gear oils



967

Mechanical Lube Meters Models 899 / 3942

Totalizing litres. 3-1/2" diameter, inlet/outlet 1/2" NPT(f).

Specifications

Model	899	3942
Dial Totals	10 liters	60 liters
Graduation	1/10 litre	1/10 litre
Extension	10" flex	Rigid
PSI	1000	1000
GPM	4	4

Value Series

40:1 Single Acting Grease Pumps

Model 4417

Includes 40:1 value series pump, drum cover, high-pressure control valve, universal swivel, coupler, 7' connecting hose, follower plate and band dolly.

Series 20

50:1 • Air-Operated • Double Acting

Model 917

Will dispense 45 ounces or 80 cubic inches of NLGI 0-2 grease per minute at 150 psi. Assures positive prime at lowest temperature. Height 43-1/8". Base 17" square. Drum not included.

Series 20

50:1 • Double Acting

Model 918

Perfect for Shop / Plant applications. Equipped with pump assembly, drum cover, air coupler, air nipple, 3' air connecting hose, 5' high-pressure grease connecting hose, deluxe follower plate, volume elbow union. Height with drum is 39-3/8". Drum not included.

Series 20

50:1 • Double Acting

Model 989

Perfect for Shop / Plant applications. Steel cover has three thumb screws to clamp securely to any original 25-50 lb. refinery container. Bucket not included.

Series 20

50:1 • Double Acting

Model 926

Perfect for Shop / Plant applications. Equipped with pump assembly, drum cover, air coupler, air nipple, 3' air connecting hose, 5' high-pressure grease connecting hose and volume elbow union. Height with drum is 46". Drum not included.

Series 40

50:1 • High Output • Double Acting

Model 1418

Perfect for Shop / Garage applications. Drum not included.

Specifications	
Model	4417
Container Size	120 lb.
Drum	Not included
Ratio	40:1
Volume Output/Minute	5 in ³ / 82 cm ³
Maximum Air Pressure	100 psi
Maximum Grease Output Pressure	6000 psi

Specifications					
Model	917	989	918	989	1418
Container Size	120 lb.	25 – 50 lb.	120 lb.	400 lb.	120 lb.
Drum	Not Included	Not Included	Not Included	Not Included	Not Included
Base	Included	N/A	N/A	N/A	N/A
Ratio	50:1	50:1	50:1	50:1	50:1
Volume Output/Minute	80 cu. in.	80 cu. in.	80 cu. in.	80 cu. in.	90 cu. in.
Maximum Air Pressure	150 psi	150 psi	150 psi	150 psi	150 psi





8541-5

High-Pressure Portable H-Pump Model 8541-5

Designed for high-pressure industrial and agricultural applications. Pump is packaged with all components necessary for mobile dispensing. Drum not included.

- Use with 120-lb. containers
- Pump ratio:70:1
- Approximate delivery per minute: 2 lb.

Medium-Pressure Portable H-Pump Model 8553-2

Designed for medium-pressure industrial and agricultural applications. Pump is packaged with all components necessary for mobile dispensing.

- Designed for heavy oils and light greases
- Use with 35-lb. pails
- Pump ratio: 26:1
- Approximate delivery per minute: 0.75 gal

Pneumatic RAM pumps (mobile) Models 9911 / 9941

Mobile RAM Grease Pumps offer portability, quiet operation and quick serviceability. Most models come equipped with all necessary accessories for fast and easy setup.

Specifications					
Model	9911-Z1	9941	9911-HA1	9911-HB1	9911-HC1
Drum Size	35 lb.	120 lb.	12.5 kg.	20 kg.	50 kg. (120 lb.)
Ratio	50:1	70:1	50:1	50:1	50:1
Delivery	4.5 lb./min.	3.25 lb./min.	2.04 kg./min.	2.04 kg./min.	2.04 kg./min.



8553-2



9911



CODE 860

Electric Grease Pump

Model 7175-R4

Designed for heavy-duty industrial and mining applications. Ideal for when compressed air or hydraulic service is not available.

- Delivery: 14 oz. per minute NLGI #1 grease (70°F)
- 115V, 50/60 Hz 3/4 HP motor
- 25' three-wire electric cable
- 40-lb. grease capacity
- Maximum pressure: 5,000 (built-in switch shuts off motor).



STRONGARM

CODE 484

25-50 lb. Grease Pump

Model 50100A

- Dispensing volume is 27 ounces per minute
- Equipped with a rugged 50:1 pump
- Designed for use with 25-50 lb. containers
- Bucket not included.



50100A

120 lb. Grease Pump

Model 50120A

- Dispensing volume is 27 ounces per minute
- Equipped with a rugged 50:1 pump
- Designed for use with 120 lb. containers.
- Bucket not included.




50120A

400 lb. Grease Pumps

Model 50130A

- Dispensing volume is 27 ounces per minute
- Equipped with a rugged 50:1 pump
- Complete with control valve, 4 meters of hose, drum cover and follower plate.
- Designed for use with 400 lb. containers.

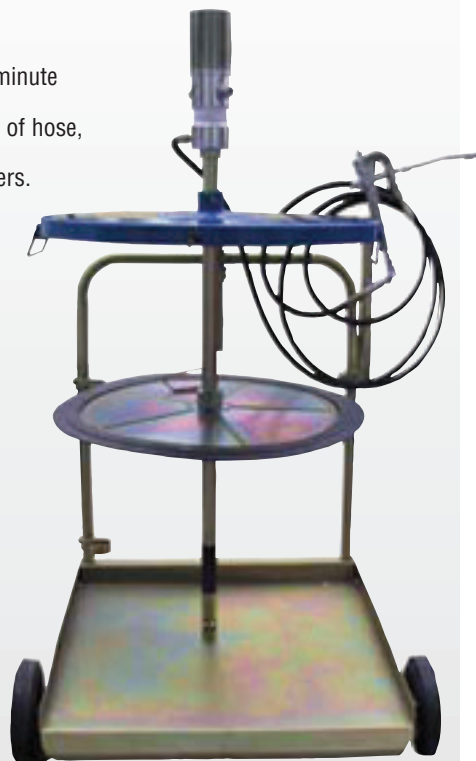

50130A



282398

Series 25

3:1 • Motor Oil, ATF, Gear Lube and Other Fluid Lubricants

All models based on the 282396 series 25,3:1 bare oil pump which delivers 6 gpm free flow plus a suction tube.

Model 282398

3:1 pressure ratio. Delivers a uniform six gallons of product per minute free delivery.

Model 2437

Complete with pump, lubricant connecting hose, volume elbow, air connecting hose, air coupler, air nipple.

Model 2424

Comes complete volume union elbow, air coupler, air nipple, lubricant connecting hose and air hose.

Model 284168

Comes complete with pump and universal suction tube kit, bung bushing, air and lubricant connecting hose. Pumps oil, gear lube, ATF, etc. from tanks, drums.



2424



284168



CODE 860

Pneumatic RAM Gear Oil Pump

Model 9961-1

Mobile RAM Gear Oil Pump offers portability, quiet operation and quick serviceability.

- Delivery: Up to 4 gallons per minute (at 150 psi for SAE 140 gear oil)
- 5:1 Pump ratio
- Drum size: 16 gallons
- Bare pump
- Includes drum cover, control valve, 5-1/2' material hose, in-line electronic meter, steel dolly, dispensing valve.



Bench Tank Package

Model 1000-E





Tote-A-Lube Liquid Storage System

This design makes liquid storage neat, clean, convenient and stackable. These strong and durable 32, 70, 120, 180, 205 and 240 gallon tanks are industrial strength.

- High-density UL rated polyethylene tanks
- Superior strength corrugated V-groove side walls
- Patented 6-1/2 inch cut out area in bottom corner of stationary tanks for easy filling when stacked
- See-through plastic and embedded gauges
- When used in conjunction with Tote-A-Lube containment vessel, provides compliance to government secondary containment regulations
- *System components sold individually.*

Specifications

Model	T70-265L	T120-455L	T180-680L	T240-907L	WST32-120L	WST71-268L	WST205-755L
Tank	70 Gallon Stackable	120 Gallon Stackable	180 Gallon Stackable	240 Gallon Stackable	32 Gallon Wall	71 Gallon Wall	205 Gallon (Cylindrical)
Dimensions	32" x 32" x 20" H	32" x 32" x 32" H	42" x 42" x 32" H	42" x 42" x 42" H	18" x 36" x 15" H	18" x 36" x 30" H	32" dia. x 63" H
Weight	35 lbs	50 lbs	75 lbs	130 lbs	N/A	N/A	70 lbs